

XUTIAN PACKING MACHINE

Our goal is to make every customer completely satisfied with the best packaging machinery and services through continuous improvement and employee involvement.

We believe that innovation is key to our success. Through a firm commitment to research and development, we have earned a reputation for being at the forefront of packaging innovation. We provide our customers with advanced solutions that increase production efficiency, improve load integrity and reduce operating costs. Over the years, we've continuously refined our existing products and created new ones to take advantage of evolving technologies and to meet our customers' ever-changing needs.

Dongguan Xutian Machine Co.,Ltd.

ADD: NO.16,Foziao Industrial 1st Road,Dalang Town,Dongguan,Guangdong,China

Web: www.xutianpack.com

Tel: +86-769-83123335/83131314/83131315

Fax:+86-769-83131818

Taizhou Xutian Packing Machine Co.,Ltd.

ADD: No.1355, Haiyun Road, Jiaojiang District, Taizhou City, Zhejiang Province, China

Tel: +86-576-88833688/88833689

Fax: +86-576-88833690

Shanghai Zhaotian Packing Machine Co.,Ltd.

ADD: Funeng Building, Huaxu Highway, Xujing Town, Shanghai

Tel: +86-21-66112777/56061188

Fax: +86-21-66112333

International

<http://www.xutianpack.com>

E-mail: joanna@xutian-china.com

<http://www.xutian-china.com>

E-mail: lois@xutian-china.com

E-mail: weiwei@xutian-china.com



SUNPACK



TO MAKE BANDING EASY
Taizhou. Dongguan. Shanghai. Italy

Catalog

• About Sunpack

Development History	03
Company Profile	04
Our Vision	05
Industrial Application	06
Banding Material	07

• Banding Machine

Ultrasonic Environment Friendly Banding Solution	08
Vacuum Feed Banding Solution	13
Economical Banding Solution Heat Sealing	20
Food Industry Banding Solution	32
To Make Banding Easy	35

• Strapping Machine

Strapping Machine	45
-------------------	----

• Pallet Wrapper, Case Sealer, Strapping Tool

Moveable Wrapper	71
Turntable Pallet Wrapper	77
Fully Automatic Wrapping Machine	83
Semi-Automatic Case Sealer	88
Automatic Case Sealer	91
Strapping Tool	95

About Us

- Founded in 1990
- 33 Years History
- ISO9001: 2015
- Advanced Production Equipment
- CE Certificated
- 22 Patents
- 2 manufacturing plants
- 3 sales and service centers
- 300 employees
- 100,000+ installations of packaging machines

Development History



1997

Xutian Packing Nantong was founded

1998

Xutian Packing Taizhou was founded (Headquarter)

2000

Xutian Packing Dongguan was founded (Southern Branch)

2001

Xutian Packing Shanghai was founded

2023

Xutian Packing Europe was founded

Core Competence

- 25 years of experience for packaging machinery
- 12 brands
- 22 patents
- 15 years of research and development for banding machines
- 25 years of research and development for strapping machines
- Leading manufacturer for banding machines and strapping machines

Company Profile

Xutian is a company where customer value comes first. Innovation, Research and Development, and service are the three top priorities of Xutian's work in the end-of-line packaging industry. Xutian Packaging has been designing, manufacturing, distributing and servicing high-performance machinery products since 1997. As a result, Xutian is able to offer customized packaging solutions to its customers from a variety of industries.

Global Distribution

Domestic Market: East, South, North and South-West

International Market: Export to 70+ Countries. Main Market is Turkey, France, Italy, Poland, USA, Canada, Korea, Japan, Brazil, Argentina, Chile and South Africa



Our Vision

We are dedicated in developing more sustainable packaging solutions. Everyone is responsible for a green world.

Consumable Saving | Labor Saving | Higher Efficiency | More Benefits

Global Locations

Xutian China (Taizhou)

Taizhou Xutian is our headquarter.

Xutian China (Dongguan)

Dongguan Xutian is our southern branch in Guangdong, China. In our showroom, you could learn about our latest technologies and industrial applications. Our team of sales experts and engineers provide you training on how to improve your business with products from Xutian Packaging.


Xutian China (Shanghai)

Shanghai ZhaoTian is our sales and service center in Shanghai, China.



Xutian Europe (Italy)

Xutian Packing Milan is our sales and service center in Europe.

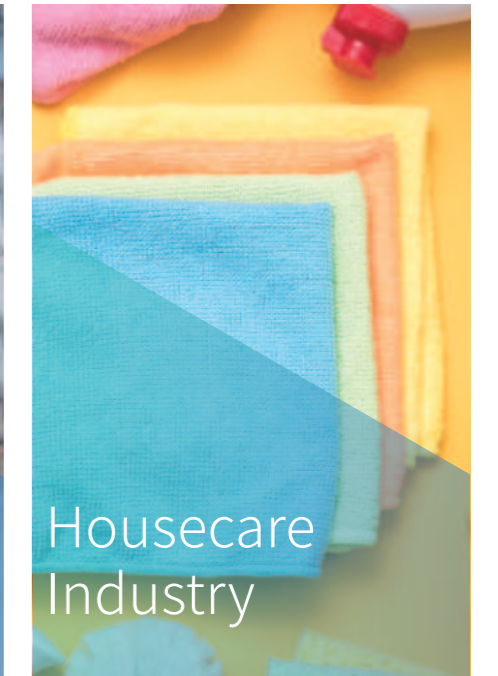Industrial Application



Banding Material






Saving
 Less Material Consumption: 40-80Mic OPP Film
 Less Labor Cost
 Easy Open Paper Band Sealing



Multiple Specification
 Band Width: 30-150mm, Arch Size: Can be customized

Brand Display
 Color mark sensor helps locate the printed bands at a specific position around a package

Product Information Display
 Thermal transfer printer can print letters, numbers, dates, QR code and images

PP Strapping Band



PP Strapping Colour
 Transparent, Semi-transparent, Colourful

PP Strapping Raw Material
 Virgin Material, Recyclable Material

PP Strapping Application Grade
 Hand Grade & Semi-Auto Grade & Auto Grade

PP Strapping width
 5mm, 9mm, 12mm, 13.5mm, 15mm, 19mm




PP Strapping Thickness
 0.25mm, 0.35mm, 0.45mm, 0.55mm, 0.6mm, 0.7mm, 0.8mm-1.0mm



Ultrasonic
 Environment
 Friendly Banding
 Solution



■ Application



Model	WK05-30B
Description	High table ultrasonic banding machine
Applicable Material	OPP film
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:500 meters Core:76mm
Arch Size	W470*H208mm
Banding Size	Min: W40* H25mm Max: W460*H200mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	450W
Control System	PCB+ LCD screen control panel
Banding Speed	28bands/Minute
Banding Tension	5-40N
Welding Method	Ultrasonic cold welding
Machine Weight	84KG
Machine Dimension	L 644*W 430*H 1256mm





Application



Model	WK35-50C-MR
Description	Ultrasonic high tension banding machine
Applicable Material	OPP film
Material Specification	Width: 49-49.3mm Thickness: 110-150mic Length: 500 meters Core: 76mm
Arch Size	W300*H190mm
Banding Size	Min:W60*H60mm Max: W290 *H180mm
Table Height	900mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1300W
Control System	PLC+ Schneider touch screen
Banding Speed	20 bands/Minute
Banding Tension	5-100N
Welding Method	Ultrasonic cold welding
Air Supply	0.4-0.7mpa
Machine Weight	150kg
Machine Dimension	L 1265 *W 505 *H 1380mm



■ Application



Model	Table top automatic PP strapping machine
Description	WK35-08C1
Applicable Material	PP strap
Material Specification	Width:7.5±0.4 mm Thicknessg:0.35±0.05mm Length:750±30mm Core:102mm
Arch Size	W374* H207mm
Banding Size	Min :L25mm*W50mm Max :W360*H200mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	500W
Control System	PCB
Banding Speed	15bands/Minute
Banding Tension	50-120N
Welding Method	Ultrasonic cold welding
Machine Weight	45KG
Machine Dimension	L810*W405*H520mm



■ Application



Model	WX06-40LB
Description	Label banding machine
Applicable Material	OPP film tape or kraft paper tape
Material Specification	Width: 40-40.3mm Thickness: 40-120mic Length: 500-1200m Core: 76mm
Arch Size	W370*H208mm
Banding Size	Min : L100*W60mm Max : W240*H200mm
Table Height	970~1020mm
Power Supply	220V 50Hz 1phase
Power Rate	1500W
Control System	PLC+ Touch Screen (Schneider)
Banding Speed	15bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Air Supply	0.4-0.7Mpa
Machine Weight	620KG
Machine Dimension	L1700*W1900*H1900mm



Vacuum Feed Banding Solution



Application



Description	Fully automatic vacuum feed banding machine
Model	WK06-75C3A-MRQ
Applicable Material	Kraft paper/ OPp film
Material Specification	Width:75mm Thickness: 0.04-0.13mm
Banding Speed	27 bands/minute (no coding) 18 bands/minute (coding)
Banding Tension	5N-40N
Banding Size	Max: W360*H200mm Min: L50*W10mm
Power Supply	220V/110V 50Hz/60Hz
Machine weight	180KG
Power Rate	1650W
Machine Dimension	L1270*W665*H1775mm



Application



Description	Automatic vacuum feed banding machine
Model	WK06-75C3-MRQ
Applicable Material	Kraft paper/ OPP film
Material Specification	27 bands/minute (no coding) 18 bands/minute (coding)
Banding Speed	Width:75mm Thickness: 0.04-0.13mm
Banding Tension	5N-40N
Banding Size	Max: W360*H200mm Min: L50*W10mm
Power Supply	220V/110V 50Hz/60Hz
Machine weight	180KG
Power Rate	1650W
Machine Dimension	L1270*W665*H1775mm



Application



Model	WK06-40C-MQ	WK06-50C-MQ	WK06-75C-MQ
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:40-40.3mm Thickness:40-120mic Length:500-1200meters Core:76mm	Width:50-50.3mm Thickness:40-120mic Length:500-1200meters Core:76mm	Width:75-75.3mm Thickness:40-120mic Length:500-1200meters Core:76mm
Arch Size	W370*H208mm	W370*H208mm	W370*H208mm
Banding Size	Min: W50*H25mm Max:W360*H200mm	Min: W60*H25mm Max:W360*H200mm	Min: W85*H25mm Max:W360*H200mm
Eye Mark Sensor	Yes	Yes	Yes
Table Height	880mm	880mm	880mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	800W	800W	800W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	28 bands/minute	28 bands/minute	28 bands/minute
Banding Tension	5-40N	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Machine Weight	125KG	125KG	125KG
Machine Dimension	L990*W500*H1215mm	L990*W500*H1215mm	L990*W500*H1215mm




Application



Model	WK06-100C-MQ	WK06-125C-MQ	WK06-150C-MQ
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:100-100.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm	Width:125-125.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm	Width:150-150.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm
Arch Size	W370*H208mm	W370*H208mm	W370*H208mm
Banding Size	Min: W110*H25mm Max:W360*H200mm	Min: W135* H25mm Max:W360*H200mm	Min: W160*H25mm Max:W360*H200mm
Eye Mark Sensor	Yes	Yes	Yes
Table Height	880mm	880mm	880mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	800W	1150W	1150W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	28 bands/minute	25 bands/minute	25 bands/minute
Banding Tension	5-40N	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Machine Weight	133KG	140KG	140KG
Machine Dimension	L990*W650*H1215mm	L990*W550*H1215mm	L990*W650*H1215mm



Application




Model	WK06-40C-MRQ	WK06-50C-MRQ	WK06-75C-MRQ
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:40-40.3mm Thickness:40-120 mic, Length:500-1200meters Core:76mm	Width:50-50.3mm Thickness:40-120 mic, Length:500-1200meters Core:76mm	Width:75-75.3mm Thickness:40-120 mic, Length:500-1200meters Core:76mm
Arch Size	W370*H208mm	W370*H208mm	W370*H208mm
Banding Size	Min: W110*H25mm Max: W360*H200mm	Min: W135*H25mm Max: W360*H200mm	Min: W160*H25mm Max: W360*H200mm
Air Supply	0.4-0.7Mpa	0.4-0.7Mpa	0.4-0.7Mpa
Table Height	880mm	880mm	880mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1250W	1250W	1250W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	18 bands/minute	18 bands/Minute	18 bands/minute
Banding Tension	5-40N	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Machine Weight	140KG	145KG	145KG
Machine Dimension	L1253*W502*H1215mm	L1253*W502*H1215mm	L1253*W502*H1215mm

Option Band Width : 20mm,30mm, 40mm, 50mm, 75mm,100mm, 125mm, 150mm



Application



Model	WK06-100CA-MQ	WK06-125CA-MQ	WK06-150CA-MQ
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:100-100.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm	Width:125-125.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm	Width:150-150.3mm Thickness:40-120 mic Length:500-1200meters Core:76mm
Arch Size	W370*H208mm	W370*H208mm	W370*H208mm
Banding Size	Min: W110*H25mm Max:W360*H200mm	Min: W135*H25mm Max:W360*H200mm	Min: W160*H25mm Max:W360*H200mm
Air Supply	0.4-0.7Mpa	0.4-0.7Mpa	0.4-0.7Mpa
Table Height	880mm	880mm	880mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1250W	1600W	1600W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	18 bands/minute	16 bands/minute	16 bands/minute
Banding Tension	5-40N	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Machine Weight	153KG	160KG	160KG
Machine Dimension	L1253*W550*H1215mm	L1253*W650*H1215mm	L1253*W650*H1215mm

Option Band Width : 20mm,30mm, 40mm, 50mm, 75mm,100mm, 125mm, 150mm



■ Application




Model	WK06-50CT1P-7045
Description	Ultrasonic high tension banding machine
Applicable Material	OPP tape or kraft paper band
Material Specification	Width: 50-50.3mm Thickness: 40-120mic Length: 500-1200m Core: 76mm
Arch Size	W720xH480mm
Banding Size	Min: W60*H25mm Max: W700*H480mm
Power Supply	220V 80Hz(or 110v/60Hz)800W
Control System	PLC+ Schneider touch screen
Banding Speed	20bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Dimension	L1440*W500*H1600mm



Economical Banding
Solution - Heat sealing



■ Application



Model NO	WK02-20/30G	WK02-20/30GB
Banding Speed	25 Bundles/Min	25 Bundles/Min
Motor Type	DC Motor	DC Motor
Control System	PCB+LCD Display	PCB+LCD Display
Band Type	OPP Film/Kraft Paper	OPP Film/Kraft Paper
Band Width	19.2-19.6mm/29.2-29.6mm	19.2-19.6mm/29.2-29.6mm
Band Thickness	100-130MIC	100-130MIC
Band Core	40mm	40mm
Band Length	150M	500M
Sealing Method	Heat Sealing	Heat Sealing
Banding Tension	5-40N	5-40N
Banding Size	MAX:460*200mm	MAX:460*200mm
	MIN:30*10mm	MIN:30*10mm
Arch Size	470*200mm	470*200mm
Machine Dimension	L611 X W364 X H475 mm	L611 X W364 X H1214 mm
Power Supply	220V 50hz 1Phase/110V 60hz 1Phase	220V 50hz 1Phase/110V 60hz 1Phase
Power	120W	240W
Net Weight	45KG	72KG



■ Application



Model	WK02-20BP	WK02-30BP
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:19-19.3mm Thickness:110-120mic Length:500meters Core:40mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W470*208Hmm(Can be customized)	W470*208Hmm(Can be customized)
Banding Size	Min:L110*W25mm Max:W460*H200mm	Min:L110*W25mm Max:W460*H200mm
Table Height	965mm	965mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	130W	130W
Control System	PCB+Key board control panel	PCB+Key board control panel
Banding Speed	18 bands/minute	18 bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Air Supply	0.4-0.7Mpa	0.4-0.7Mpa
Machine Weight	95KG	95KG
Machine Dimension	L707*W410*H1415mm	L707*W410*H1415mm



■ Application



Model	WK02-20Y	WK02-30Y
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:19-19.3mm Thickness:110-120mic Length:500meters Core:40mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W208*H330mm	W208*H330mm
Banding Size	Min:L30*H25mm Max:W200*H320mm	Min:L40*H25mm Max:W200*H320mm
Table Height	600mm	600mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	130W	130W
Control System	PCB+Key board control panel	PCB+Key board control panel
Banding Speed	23bands/minute	23bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	85KG	85KG
Machine Dimension	L1100*W505*H875mm	L1100*W505*H875mm



Application



Model	WK02-20B-N1	WK02-30B-N1
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:19-19.3mm Thickness:110-120mic Length:500meters Core:40mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W470*H208mm	W470*H208mm
Banding Size	Min:L30*W25mm Max:W460*H200mm	Min:L40*W25mm Max:W460*H200mm
Table Height	850mm	850mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	130W	130W
Control System	PCB+Key board control panel	PCB+Key board control panel
Banding Speed	23bands/minute	23bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	72KG	72KG
Machine Dimension	L720*W410*H1080mm	L720*W410*H1080mm



■ Application



Model	WK02-30A
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:150meters Core:40mm
Arch Size	W470*H208mm
Banding Size	Min:L80*W25mm Max:W460*H200mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	180W
Control System	PLC+Key board control panel
Band QTY	0 or 1 or 2 bands
Banding Speed	16bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Weight	49KG
Machine Dimension	L650*W500*H474mm



■ Application



Model	WK02-30AB
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W470*H208mm
Banding Size	Min: L80*W25mm Max:W460*H200mm
Table Height	985mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	230W
Control System	PLC+Key board control panel
Band QTY	0 or 1 or 2 bands
Banding Speed	16bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Weight	87KG
Machine Dimension	L650*W500*H1214mm




■ Application



Model	WK02-30CA
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W470*H208mm
Banding Size	Min:L80*W25mm Max:W460*H200mm
Table Height	850mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	230W
Control System	PLC+Key board control panel
Band QTY	0 or 1 or 2 bands
Banding Speed	16bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Weight	115KG
Machine Dimension	L680*W500 *H1135mm




Application

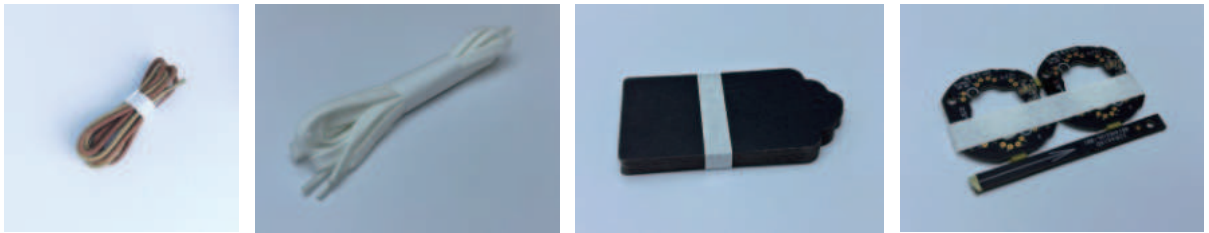

Model	WK02-12C1
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:11-11.3mm Thickness:110-120mic Length:150meters Core:40mm
Arch Size	W200*H185mm
Banding Size	Min:L20*W15mm Max:W190*H180mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	120W
Control System	PCB+ LCD screen control panel
Banding Speed	25 bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Weight	31.5KG
Machine Dimension	L704*W358*H448mm




■ Application

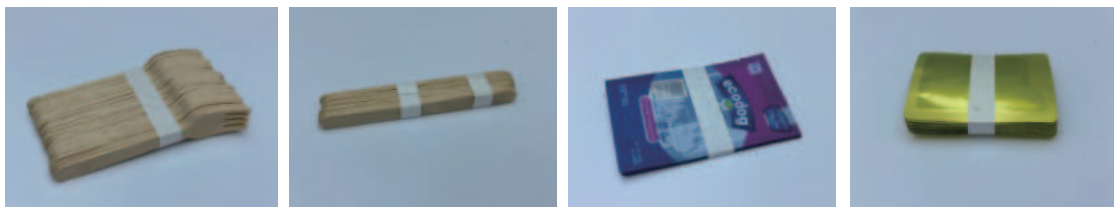

Model	WK02-12C1B
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:11-11.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W200*H185mm
Banding Size	Min:L20*W15mm Max:W190*H180mm
Table Height	850mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	170W
Control System	PCB+LCD screen control panel
Banding Speed	25 bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Weight	67KG
Machine Dimension	L500*W358*H1054mm



Application



Model	WK32-30C	WK32-30C-7035
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:40mm
Arch Size	W470*H208mm	W710*H358mm
Banding Size	Min:L40*W25mm Max:W460*H200mm	Min:L40*W25mm Max:W700*H350mm
Table Height	850mm	850mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	400W	400W
Control System	PCB+LCD screen control panel	PCB+LCD screen control panel
Banding Speed	24 bands/minute	20 bands/minute
Banding Tension	5-100N	5-100N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	92KG	113KG
Machine Dimension	L695*W380*H1116mm	L935*W380*H1266mm



Application



Model	WK02-30CA1-4620	WK02-30CA1-6620	WK02-30CA1-6632
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:76mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:76mm	Width:29-29.3mm Thickness:110-120mic Length:500meters Core:76mm
Arch Size	W470*H208mm	W670*H208mm	W670*H328mm
Banding Size	Min:L80*W60mm Max:W460*H200mm	Min:L80*W60mm Max:W660*H200mm	Min:L80*W60mm Max:W660*H320mm
Table Height	880mm	880mm	880mm
Power Supply	220V 50hz 1phase 110V 60hz 1phase	220V 50hz 1phase 110V 60hz 1phase	220V 50hz 1phase 110V 60hz 1phase
Power Rate	500W	500W	500W
Control System	PCB+LCD screen	PCB+LCD screen	PCB+LCD screen
Banding Speed	20 bands/minute	20 bands/minute	20 bands/minute
Band QTY	0 or 1 or 2 bands	0 or 1 or 2 bands	0 or 1 or 2 bands
Banding Tension	5-40N	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Machine Weight	136KG	156KG	166KG
Machine Dimension	L750*W535*H1123mm	L950*W535*H1123mm	L950*W535*H1243mm



■ Application



Model NO	WK31-08C1
Language	Simplified Chinese/ English
Raw Material	PP Strapping Band
Tape Width	8-10mm
Tape Thickness	0.35mm~0.5mm
Roll Size	100mm(ID) × 170mm(OD) × 150mm(W)
Banding Size	Max:W350mm × H180mm Min: L60*W60 × H40mm
Voltage	110/220V 50/60Hz (Customized)
Control System	PCB
Max Speed	18Bands/min
Tension	20-200n Adjustable
Sealing Way	Heat Sealing
Power	150w
Dimensions	L795 × W405 × H485mm
Table Height	222mm
Machine Weight	45kgs
Shell Material	Carbon Steel (Customized Option: 304 Stainless Steel)



Food Industry Banding Solution



Application



Model	WK04-30C-M	WK04-50C-M
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:80-120mic Length:500-1000meters Core:76mm	Width:49-49.3mm Thickness:80-120mic Length:500-1000meters Core:76mm
Arch Size	W370*H208mm	W370*H208mm
Banding Size	Min:L40*W60mm Max: W360*H200mm	Min:L60*W60mm Max:W360*H200mm
Table Height	900mm	900mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	650W	650W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	30bands/minute	30bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	110KG	120KG
Machine Dimension	L950*W505*H1335mm	L950*W505*H1335mm



■ Application



Model	WK04-30CA-MR	WK04-50CA-MR
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:80-120mic Length:500-1000meters Core:76mm	Width:49-49.3mm Thickness:80-120mic Length:500-1000meters Core:76mm
Arch Size	W370*208mm	W370*208mm
Banding Size	Min:L80*W60mm Max:W360*H200mm	Min:L100*W60mm Max:W360*H200mm
Table Height	900mm	900mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1200W	1200W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	20bands/minute	20bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	148KG	158KG
Air Supply	0.4-0.7Mpa	0.4-0.7Mpa
Machine Dimension	L1140*W570*H1335mm	L1140*W570*H1335mm



Application



Model	WK04-30CA-M	WK04-50CA-M
Applicable Material	OPP tape or kraft paper band	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:80-120mic Length:500 -1000 meters Core:76mm	Width:49-49.3mm Thickness:80-120mic Length:500 -1000 meters Core:76mm
Arch Size	W370*208mm	W370*208mm
Banding Size	Min:L80*W60mm Max:W360*H200mm	Min:L100*W60mm Max:W360*H200mm
Table Height	900mm	900mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1100W	1100W
Control System	PLC+Schneider touch screen	PLC+Schneider touch screen
Banding Speed	20 bands/minute	20 bands/minute
Banding Tension	5-40N	5-40N
Sealing Method	Heat sealing	Heat sealing
Machine Weight	140KG	150KG
Machine Dimension	L1140*W570*H1335mm	L1140*W570*H1335mm



Printing Industry To Make Banding Easy



Application



Model	WK02-30FSBS
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:29-29.3mm Thickness:OPP film110-120mic Paper: 80g/m ² Length:500-800meters Core:40mm
Production Output	1 Bundle/m (10*100 notes)
Arch Size	W470*H208mm
Banding Size	Min:L40*W25mm Max:W460*H200mm
Table Height	960mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	1500W
Control System	PLC+Schneider touch screen
Banding Speed	18 bundles/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Air Supply	0.4-0.7Mpa



■ Application



Model	WK02-30AF
Tape Type	OPP tape or kraft paper band
Material Specification	Width: 29-29.3mm Thickness:OPP film110-120mic Paper: 80g/m ² Length:500-800meters Core:40mm
Sealing Method	Heating sealing
Tension	5-40N
Arch Size	W470*H208mm
Control System	PLC+Touch screen
Banding Speed	Up to 15 bundles/min
Net Weight	300KG
Power Supply	220V 1500W 13.6A
Air Supply	0.4-0.7Mpa
Product Thickness	2-20mm
Product Width	60-100mm
Product Length	90-150mm
Machine Dimension	L1678*W740*H1366mm



Application



Model	WK02D-30-AP
Tape Type	OPP tape or kraft paper band
Material Specification	Width: 29-29.3mm Thickness: OPP film 110-120mic Paper: 80g/m ² Length: 500-800meters Core: 40mm
Arch Size	W850*H308mm
Power Supply	220V/110V 50HZ/60HZ
Control System	PLC+Touch screen control
Banding Speed	15 Bundles/min
Sealing Method	Heat sealing
Air Supply	0.4-0.7Mpa
Banding Tension	5-40N
Power	400W
Machine Dimension	L1390*W1110*H1727mm



■ Application



Model	WK02-30LAB
Tape Type	OPP tape or kraft paper band
Roll Size	76mm Diameter*800meters
Banding Size	L100-850mm*W50-280mm*H5-170mm
Sealing Method	Heating sealing
Tension	5-40N
Arch Size	W400*H208mm
Control System	Schneider PLC
Banding Speed	13-15 bands/min
Air Supply	0.4-0.7Mpa
Power Supply	220V/110V 50Hz/60Hz 1 phase
Machine Weight	232KG
Machine Dimension	L1678*W740*H1366mm



■ Application



Model	WK02-30AM10
Tape Type	OPP tape or kraft paper band
Tape Width	29-29.3mm
Tape Thickness	110-120mic
Sealing Method	Heating sealing
Tension	5-40N
Table Height	950mm
Control System	PLC
Banding Speed	12 packs/min
Air Supply	0.4-0.7Mpa
Power Supply	220V/110V 50Hz/60Hz 1 phase
Machine Weight	170KG



■ Application



Model	WK02-30ABE
Tape Type	OPP tape or kraft paper band
Material Specification	40mm diameter*500meters
Banding Size	L100-150mm*W60-150mm*H20-150mm
Sealing Method	Heating sealing
Tension	5-40N
Table Height	950mm
Control System	PLC
Banding Speed	20 packs/min
Air Supply	0.4-0.7Mpa
Power Supply	220V/110V 50Hz/60Hz 1 phase




Application



Model	WK04-50C2E-M
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:49-49.3mm Thickness:80-120mic Length:500-1000meters Core:76mm
Banding Size	Min:L60*W60mm Max:W360*H200mm
Table Height	900mm
Power Supply	380V 50Hz/60Hz 3Phase
Control System	PLC+ Schneider touch screen
Banding Speed	25 bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Machine Dimension	L1300*W1387*H2075



Application

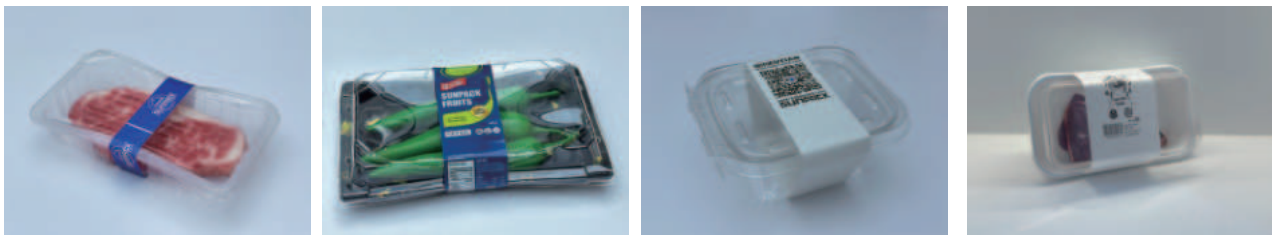

Model	WK04-50CA-MRL2
Applicable Material	OPP tape or kraft paper band
Material Specification	Width:49-49.3mm Thickness:80-120mic Length:500-1000meters Core:76mm
Arch Size	W370*H208mm
Banding Size	Min: L100*W60mm Max: W 360*H200mm
Table Height	900mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	3500W
Control System	PLC+Schneider touch screen
Banding Speed	23*2 bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Air Supply	0.4-0.7Mpa
Machine Dimension	L3615*W1387*H2075mm




Application



Model	WX02-30BMB
Description	Book and newspaper banding machine
Applicable Material	OPP tape or kraft paper band
Material Specification	Width: 29-29.3mm Thickness: 110-120mic Length: 500m Core: 76mm
Arch Size	W470*H328mm
Banding Size	Min : W110xL110×H10mm Max : W240xL310 x H270mm
Table Height	970~1020mm
Power Supply	220V 50Hz 1phase
Power Rate	1800W
Control System	PLC+ Touch Screen (Schneider)
Banding Speed	15 bands/minute
Banding Tension	5-40N
Sealing Method	Heat sealing
Air Supply	0.4-0.7Mpa
Machine Weight	1400KG
Machine Dimension	L3700*W1035*H2140mm



Application



Model	WX05-30FB
Description	Banding machine with friction feeder
Applicable Material	OPP tape or kraft paper tape (ultrasonic special)
Material Specification	Width: 29-29.3mm Thickness: 110-120mic Length: 500m Core: 76mm
Arch Size	W300*H206mm
Banding Size	Min : W60xL110mm Max : W110xL200mm
Table Height	970~1020mm
Power Supply	220V 50Hz 1phase
Power Rate	2900W
Control System	PLC+ Touch Screen (Schneider)
Banding Speed	18 bands/minute
Banding Tension	5N~40N
Sealing Method	Ultrasonic welding
Air Supply	0.4-0.7Mpa
Machine Weight	680KG
Machine Dimension	L1700*W1900*H1900mm

SUNPACK®



Strapping Machine



Model	TD-88	TD-88A	TD-88AL
Description	High table semi-automatic strapping machine-Close body	High table semi-automatic strapping machine-Open body	Low table semi-automatic strapping machine
Motor	2 DC motors	2 DC motors	2 DC motors
Power Supply	220V 50-60Hz 1phase 110V 50-60Hz 1phase	220V 50-60Hz 1phase 110V 50-60Hz 1phase	220V 50-60Hz 1phase 110V 50-60Hz 1phase
Control System	PCB	PCB	PCB
PP Strapping Width	5-15.5mm	5-15.5mm	5-15.5mm
PP Strapping Thickness	0.35-1.0mm	0.35-1.0mm	0.35-1.0mm
Strapping Roll Size	Height:200mm Core:200mm Outer diameter:450mm	Height:200mm Core:200mm Outer diameter:450mm	Height:200mm Core:200mm Outer diameter:450mm
Max Strapping Tension	5-40kg	5-40kg	5-40kg
Strapping Size	Min:L100*W30mm Max:No Limit	Min:L100*W30mm Max:No Limit	Min:L100*W30mm Max:No Limit
Strapping Speed	<=/ 5 seconds/strap	<=/ 5 seconds/Strap	<=/ 5 seconds/strap
Sealing Method	Heat sealing	Heat sealing	Heat sealing
Power	150W	150W	150W
Max Loading Weight	80KG	80KG	80KG
Table Height	750mm	750mm	460 mm
Machine Weight	65KG	60KG	60KG
Machine Dimension	L785*W545*H750mm	L785*W545*H750mm	L1490*W545*H460mm



Description	High Speed Automatic Strapping Machine
Model	Q80KS
Control System	PCB+LCD Screen(PLC is possible)
Motor	German Dunker DC
Sealing Method	Heat sealing
Strapping Speed	1.2 Seconds/Strap
Arch Size	W600*H500mm,W800*H500mm,W1000*H500mm,W1250*H500mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 5/9/12mm ,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W550*H450mm
Min Strapping Size	W100*H50mm
Table Height	500-600mm or 600—680mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L930*W710*H1430(600*500mm)



Description	Automatic Strapping Machine
Model	Q8-4030
Control System	PCB+LCD screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/Strap
Arch Size	W400*H300mm
Material	Virgin PP strapping band
Material Specification	8-12mm (Width)*0.45-0.75mm(Thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W350*H270mm
Min Strapping Size	W100*H50mm
Table Height	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1254*W620*H1200mm



Description	Automatic Strapping Machine
Model	Q8S-C
Control System	PLC+Touch Screen
Motor	German Dunker DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/Strap
Arch Size	W600*H500mm,W800*H600mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 9-12mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W550*H450mm
Min Strapping Size	W100*H50mm
Table Height	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1605*W620*H1652mm(W600*H500)



Description	Automatic Horizontal Strapping Machine
Model	Q8KH
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 seconds/strap
Arch Size	W800*H500mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 9-12mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W700*H400mm
Min Strapping Size	W100*H100mm
Table Height	500-600mm or 600-680mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1605*W620*H1652mm(W600*H500)



Description	Automatic Orbital Strapping Machine
Model	Q8KR
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 seconds/strap
Ring Diameter	600MM
Material	Virgin PP strapping band
Material Specification	Width 9-12mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Strapping Size	$D \leq 550\text{mm}$; $D \geq 100\text{mm}$; $H \leq 90\text{mm}$; $R \geq 100\text{mm}$
Table Height	830-900mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1005*W770*H1510mm



Description	Side arch strapping machine
Model	Q8Y
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 seconds/strap
Arch Size	W600*H800mm (Customized)
Material	Virgin PP strapping band
Material Specification	Width 9-12mm,13-15.5mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W500*H800
Min Strapping Size	W100*H150mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1605*W620*H1652mm(W600*H500)



Description	Automatic Strapping Machine	High Speed Automatic Strapping Machine
Model	Q8	Q8S
Control System	PCB+LCD Screen	PCB+LCD Screen
Motor	China VTV DC	German Dunker DC
Sealing Method	Heat sealing	Heat sealing
Strapping Speed	1.5 seconds/strap	1.2 seconds/strap
Arch Size	W600*H500mm W800*H600mm(Customized)	W600*H500mm W800*H600mm(Customized)
Material	Virgin PP strapping band	Virgin PP strapping band
Material Specification	Width 8-12mm,13-15.5mm Thickness 0.45-0.75mm	Width 8-12mm,13-15.5mm Thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm	Ø200mm
Table Loading Weight	2-80KG	2-80KG
Strapping Tension	20-400N	20-400N
Max Strapping Size	W550*H450mm	W550*H450mm
Min Strapping Size	W100*H50mm	W100*H50mm
Table Height	750mm	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1605*W620*H1652mm(W600*H500)	L1605*W620*H1652mm(W600*H500)




Description	Automatic Strapping Machine
Model	Q8-W2500*H500
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	2.5 seconds/strap
Arch Size	W2500*H500mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 10-12mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W2300mm*H450mm
Min Strapping Size	W500mm*H50mm
Table Height	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L3160*620*1400mm



Description	Low Table Strapping Machine	Low Table High Speed Strapping Machine
Model	Q8L	Q8LSC
Control System	PCB+LCD Screen	PLC+LCD Screen(PLC is possible)
Motor	China VTV DC	German Dunker DC
Sealing Method	Heat sealing	Heat sealing
Strapping Speed	1.5 seconds/strap	1.2 seconds/strap
Arch Size	W600*H500mm W800*H600mm(Customized)	W600*H500mm W800*H600mm(Customized)
Material	Virgin PP strapping band	Virgin PP strapping band
Material Specification	Width 8-9mm,10-12mm,13-13.5mm thickness 0.45-0.75mm	Width 8-9mm,10-12mm,13-13.5mm thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm	Ø200mm
Table Loading Weight	2-80KG	2-80KG
Strapping Tension	20-400N	20-400N
Max Strapping Size	W550*H450mm	W550*H450
Min Strapping Size	W100*H50mm	W100*H50mm
Table Height	450mm	450mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1755*W620*H1560mm(W600*H500)	L1755*W620*H1560mm(W600*H500)



Description	Automatic strapping machine with top press	High speed automatic strapping machine with top press
Model	Q8-P	Q8SC-P
Control System	PCB+LCD Screen	PLC+LCD Screen(PLC is possible)
Motor	China VTV DC	German Dunker DC
Sealing Method	Heat sealing	Heat sealing
Strapping Speed	2.5 seconds/strap	2 seconds/strap
Arch Size	W600*H500mm W800*H600mm(Customized)	W600*H500mm W800*H600mm(Customized)
Material	Virgin PP strapping band	Virgin PP strapping band
Material Specification	Width 8-9mm,13-13.5mm Thickness 0.45-0.75mm	Width 8-9mm,13-13.5mm Thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm	Ø200mm
Table Loading Weight	2-80KG	2-80KG
Strapping Tension	20-400N	20-400N
Max Strapping Size	W500*H400mm	W500*H400mm
Min Strapping Size	W100*H50mm	W100*H50mm
Table Height	750mm	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1360*W620*H2040mm(W600*H500)	L1360*W620*H2040mm(W600*H500)

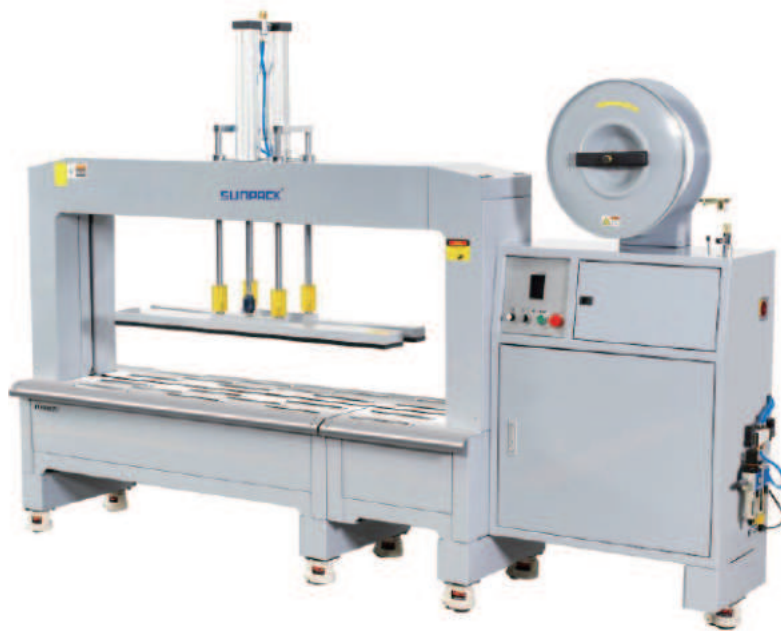

Description	Low table automatic strapping machine with top press
Model	Q8L-P
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	2.5 seconds/strap
Arch Size	W600*H500mm W800*H600mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 8-9mm,13-13.5mm thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W500*H400mm
Min Strapping Size	W100*H50mm
Table Height	450mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1360*W620*H2040mm(W600*H600)



Description	Automatic pipe/tube strapping machine
Model	Q8000G
Strap Tape	Virgin PP strapping band
Strap Specification	Width 12mm,thickness 0.45-0.75mm
Strapping Reel	Core diameter:200mm,reel width:190mm
Strapping Height	1150mm±30mm
Max Strapping Size	Inside diameter:500mm outside diameter:1100mm width:360mm
Min Strapping Size	Inside diameter:360mm outside diameter:420mm width:150mm
Servo Slide Parameters	Front and rear slide rail stroke:900mm Power: 750W Left and right rail stroke:600mm Power:400W
Cylinder Parameters	Stroke:100 Thrust:686N(backward),754N(forward)
Machine Net Weight	450KG



Description	Tile automatic strapping machine
Model	Q8N
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/strap
Arch Size	W1020*H150mm
Material	Virgin PP strapping band
Material Specification	Width 8-12mm,13-15.5mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Strapping Size	950*100mm
Table Height	750mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1710*W530*H670mm



Description	Belt table fully automatic strapping machine
Model	Q80K-M2
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/Strap(Excluding Conveyor)
Arch Size	W600*H500mm
Material	Virgin PP strapping band
Material Specification	5-6mm,8-12mm(Width)*0.45-0.75mm(Thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	20-30KG
Strapping Tension	20-400N
Max Strapping Size	W550*H450mm
Min Strapping Size	W165*H200mm
Table Height	800mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L1130*W690*H1660mm



Description	Fully automatic 2 belts conveyor table strapping machine with top press
Model	Q80K-M2P
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/Strap(Excluding Conveyor)
Arch Size	W600*H500mm
Material	Virgin PP strapping band
Material Specification	5-6mm,7-8mm,9-12mm(width)*0.45-0.75mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	20-30KG
Strapping Tension	20-400N
Max Strapping Sizes	W500*H400mm
Min Strapping Size	L200*W165*H200mm
Table Height	800-900mm(Can be adjusted)
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Air Supply	0.3-0.7Mpa
Machine Dimension	L1130*W690*H2110mm



Description	Fully automatic 2 belts conveyor table strapping machine with top press
Model	Q80LSC-M2
Control System	PLC+Touch screen
Motor	German Dunker DC
Sealing Method	Heat sealing
Strapping Speed	1.5Seconds/Strap(Excluding delivery time)
Arch Size	W600*H500mm
Material	Virgin PP strapping band
Material Specification	5-6mm,8-9mm,10-12mm(width)*0.45-0.75mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	20-30KG
Strapping Tension	20-400N
Max Strapping Sizes	W500*H400mm
Min Strapping Size	L200*W165*H200mm
Table Height	500-600mm or 600—680mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L1730*W690*H1700mm



Description	Fully automatic high table strapping machine with aluminum roller table
Model	Q8-A
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.7 Seconds/strap(Excluding delivery time)
Arch Size	W800*H600mm
Material	Virgin PP strapping band
Material Specification	8-12mm(width)*0.45-0.75mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	2-25KG
Strapping Tension	20-400N
Strapping Size	W700*H550mm
Table Height	800mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L1700*W685*H1530mm



Description	Fully automatic high table strapping machine with aluminum roller table
Model	Q8-T
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.7 Seconds/strap(Excluding delivery time)
Arch Size	W800*H600mm
Material	Virgin PP strapping band
Material Specification	8-12mm,13-15mm(width)*0.45-0.75mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	L no limit*W 700*550mm
Min Strapping Size	L 200*W180*H100mm
Table Height	800mm(Can be adjusted)
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L1700*W630*H1530mm



Description	High speed strapping machine with double dispenser
Model	Q80SC-AD-W800H500
Control System	Simens PLC + Touch screen
Motor	German Dunker DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/Strap (Excluding delivery time)
Arch Size	W800*H600mm
Material	Virgin PP strapping band
Material Specification	Width,5-6mm,8-12mm,13-15.5mm Thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-25KG
Strapping Tension	20-400N Adjustable
Strapping Size	W700*H450mm
Table Height	750-900mm Adjustable
Power Supply	220V/110V 50Hz-60Hz 1Phase 500W
Machine Dimension	L1985*W730*H(1360~1510)mm Adjustable



Description	Fully automatic aluminum roller table strapping machine with top press
Model	Q80-AP
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.7 Seconds/strap(Excluding delivery time)
Arch Size	W1250*H500mm
Material	Virgin PP strapping band
Material Specification	Width:5-6mm,7-8mm,9-12mm Thickness:0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-25KG
Strapping Tension	20-400N
Max strapping Size	L no limit*W1200*H500mm
Min Strapping Size	L 200*W180*H100mm
Table Height	800-900mm(Can be adjusted)
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L2150*W690*H2080mm



Description	Fully automatic steel roller table strapping machine
Model	Q8SC-T
Control System	Simens PLC + Touch screen
Motor	German Dunker DC
Sealing Method	Heat sealing
Strapping Speed	2.5 Seconds/strap(Excluding delivery time)
Arch Size	W2300*H500mm
Material	Virgin PP strapping band
Material Specification	10-12mm(width)*0.45-0.65mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	L no limit*W2300*H450mm
Min Strapping Size	W350*H50mm
Table Height	800-900mm(Can be adjusted)
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L3160*620*1400mm



Description	Fully automatic side arch strapping machine
Model	Q8Y-T
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.7 Seconds/strap(Excluding delivery time)
Arch Size	W600*H800mm(Customized)
Material	Virgin PP strapping band
Material Specification	Width 9-12,13-15.5mm,thickness 0.45-0.75mm
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Strapping Size	W600*H750mm
Table Height	500mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW



Description	Fully automatic low table strapping machine with aluminum roller
Model	Q8L-A
Control System	PCB+LCD Screen
Motor	China VTV DC
Sealing Method	Heat sealing
Strapping Speed	1.5 Seconds/strap(Excluding delivery time)
Arch Size	W800*H600mm
Material	Virgin PP strapping band
Material Specification	8-9mm,10-12mm(width)Adjustable*0.45-0.75mm(thickness)
Roll Core Diameter	Ø200mm
Table Loading Weight	2-80KG
Strapping Tension	20-400N
Max Strapping Size	W700*H500mm
Min Strapping Size	W180*H100mm
Table Height	450mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW
Machine Dimension	L1930*W685*H1700mm



Description	Fully Automatic squaring & strapping machine	
Model	Q80SC-APJ	Q80SC-AP-W250H600
Control System	PLC+Simens touch screen	Siemens PLC+ touch screen
Motor	Dunker servo	Dunker servo
Sealing Method	Heat sealing	Heat sealing
Strapping Speed	1.7 Seconds/strap(Excluding delivery time)	36 bands/minute
Arch Size	W1250*H500mm	W1250*H600
Material	Virgin PP strapping band	pp packing belt width 5mm
Material Specification	5-6mm,7-8mm,9-12mm(width)*0.45-0.75mm (thickness)	/
Roll Core Diameter	Ø200mm	φ200mm
Table Loading Weight	2-25KG Adjustable	2-40KGtunable
Strapping Tension	20-400N	/
Max Strapping Size	W1200*H450mm	W1200*H450mm
Min Strapping Size	L300*W300*H100mm	L300*W300*H100
Table Height	800-900mm	800mm
Power Supply	220V/110V 50Hz-60Hz 1Phase 1KW	1000W
Machine Dimension	L2330*W1025*H1950mm	L2250*W735*H1495mm



Description	Automatic corrugated squaring & strapping machine
Model	Q80-AP + XT-AF-01
Power supply	220V 50Hz 1PHASE
Power	2KW
Strapping Speed	1.7 Seconds/strap (Excluding delivery time)
Strapping Tension	20-400N
Strap Width	Width:5-6mm,7-8mm,9-12mm Thickness:0.45m-0.75mm
Strapping Quantity	1 Strap
Arch Size	W1250*H500mm Option:W1650*H 500MM
Max Package Size	1200*400mm(1250*500mm)
Min Package Size	L200*W180*H100mm
Air Supply	0.3-0.6Mpa
Cylinder Stroke	40-500mm
Cylinder Pressure	75KG Adjustable
Table Conveying Speed	18 m/minute

SUNPACK®



Moveable Wrapper



Model	Maxgo
Description	Robot pallet wrapper
Battery	103AH 12V*2pcs
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC+ Touch screen+Speed driving board
Max Moving Speed	60meters/minute
Film Carriage	Pre-stretch 300%
Max Pallet Height	2100mm (Option Max:2500mm)
Max Pallet Size	No limit
Min Pallet Size	600*600mm
Max Pallet Weight	No Limit
Min Pallet Weight	100KG
Moving Motor	400W DC Motor
Lifting Motor	180W DC Motor
Film Carriage Motor	300W DC Motor
Charging Time	12 Hours
Working Time	8 Hours
Power	1200W
Machine Weight	320KG
Machine Dimension	L1610*W1250*H2450mm



Model	XT-4510-1	XT-4510-2
Description	Robot pallet wrapper	Robot pallet wrapper
Battery	103AH 12V*2pcs	103AH 12V*2pcs
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC+ Touch screen+Speed driving board	PLC+ Touch screen+Speed driving board
Max Moving Speed	60 meters/minute	60meters/minute
Film Carriage	Brake	Pre-stretch 300%
Max Pallet Height	2100mm(Option Max:2500mm)	2100mm(Option Max:2500mm)
Max Pallet Size	No limit	No limit
Min Pallet Size	600*600mm	600*600mm
Max Pallet Weight	No limit	No limit
Min Pallet Weight	100KG	100KG
Moving Motor	400W DC Motor	400W DC Motor
Lifting Motor	180W DC Motor	180W DC Motor
Film Carriage Motor	/	300KW DC Motor
Charging Time	12 Hours	12 Hours
Working Time	8 Hours	8 Hours
Power	1000W	1200W
Machine Weight	300KG	320KG
Machine Dimension	L1480*W1170*H2224mm	L1480*W1170*H2224mm



Model	XT-4512
Description	Rotating arm pallet wrapper
Battery	20AH 12V*4pcs
Power Supply	220V 50HZ 1phase/110V 60hz 1phase 10A
Control System	PLC and touch screen
Film Carriage	Brake film carriage
Rotating Speed	1-10 Cycles/m
Max Pallet Height	1600mm
Pallet Size	1000*1000mm or 1200*800mm
Rotating Motor	250W 24V DC
Lifting Motor	90W 24V DC
Min Pallet Weight	50KG
Max Pallet Weight	1500KG
Charging Time	12 Hours
Working Time	8 Hours
Machine Weight	365KG
Machine Dimension	L1880*W1050*H2090mm



Model	XT-4511
Description	Manual pallet wrapper
Battery	20.2AH 12V*2pcs
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	Speed driving board
Film Carriage	Brake
Max Pallet Height	2100mm (Option Max: 2500mm)
Max Pallet Size	No limit
Min Pallet Size	600*600mm
Max Pallet Weight	No limit
Min Pallet Weight	100kg
Lifting Motor	200W DC Motor
Charging Time	12 Hours
Working Time	8 Hours
Power	1KW
Machine Weight	100KG
Machine Dimension	L1480*W1170*H2224mm



Model	XT-4508A
Description	Box wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC and buttons
Film Carriage	250% Pre-stretch
Turntable Speed	1-12 cycles/minute
Max Box Height	500mm
Turntable Diameter	500mm
Turntable Motor	750W
Max Box Weight	50KG
Power	1KW
Machine Weight	100KG
Machine Dimension	L900*W600*H900mm



Model	XT-4508
Description	Luggage Wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC and Keyboard
Film Carriage	250% Pre-stretch film carriage
Turntable Speed	1-12 cycles/minute
Max Height	900mm
Turntable Diameter	900mm
Luggage Size	L(400-1000)*W(200-450)*H(300-900)mm
Turntable Motor	750W
Lifting Motor	180KW
Max Weight	100KG
Power	1KW
Machine Weight	100KG
Machine Dimension	L1800*W950*H1500mm

SUNPACK[®]



Turntable Pallet Wrapper



Model	XT-4505-1	XT-4505-2
Description	Turntable pallet wrapper	Turntable pallet wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC	PLC
Film Carriage	Brake film carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)	2100mm(Option: 2600/3000mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)	1500mm (Option: 1650/1800/2000mm)
Turntable Height	80mm	80mm
Turntable Motor	750W	750W
Pre-stretch motor	/	250W
Lifting Motor	200W	200W
Max Pallet Weight	1500KG	1500KG
Power	1000W	1200W
Machine Weight	415KG	435KG
Machine Dimension	L2455*W730*H2200mm	L2455*W730*H2200mm



Model	XT-4505M-1	XT-4505M-2
Description	Transpallet turntable pallet wrapper	Transpallet Turntable pallet wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC	PLC
Film Carriage	Brake film carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)	2100mm(Option: 2600/3000mm)
Turntable diameter	1500mm	1500mm
Turntable Height	80mm	80mm
Turntable motor	750W	750W
Pre-stretch motor	/	250W
Lifting Motor	200W	200W
Max Pallet Weight	1000KG	1000KG
Power	1000W	1200W
Machine Weight	415KG	435KG
Machine Dimension	L2455*W730*H2200mm	L2455*W730*H2200mm



Model	XT-4505TP-1	XT-4505TP-2
Description	Pallet wrapper with top press	Pallet wrapper with top press
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC	PLC
Film Carriage	Brake film carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)	2100mm(Option: 2600/3000mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)	1500mm (Option: 1650/1800/2000mm)
Turntable Height	80mm	80mm
Turntable Motor	750W	750W
Pre-stretch Motor	/	250W
Lifting Motor	200W	200W
Max Pallet Weight	1500KG	1500KG
Power	1000W	1200W
Air Supply	0.6-0.7Mpa	0.6-0.7Mpa
Machine Weight	465KG	485KG
Machine Dimension	L2455*W730*H2530mm	L2455*W730*H2530mm



Model	XT-4505SP-1	XT-4505SP-2
Description	Pallet wrapper with scale and printer	Pallet wrapper with scale and printer
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC	PLC
Film Carriage	Brake film carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)	2100mm(Option: 2600/3000mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)	1500mm (Option: 1650/1800/2000mm)
Turntable Height	80mm	80mm
Turntable Motor	750W	750W
Pre-stretch Motor	/	250W
Lifting Motor	200W	200W
Max Pallet Weight	1000KG	1000KG
Power	1000W	1200W
Machine Weight	420KG	440KG
Machine Dimension	L2455*W730*H2200mm	L2455*W730*H2200mm



Model	XT-4505H-2
High Profile	High profile turntable pallet wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC
Film Carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)
Turntable Diameter	1500mm
Turntable Height	230mm
Turntable Motor	750W
Pre-stretch Motor	250W
Lifting Motor	200W
Max Pallet Weight	1500KG
Power	1200W
Machine Weight	435KG
Machine Dimension	L2455*W730*H2200mm



Model	XT-4505A-1	XT-4505A-2
Description	Automatic pallet wrapper	Automatic pallet wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC and touch screen	PLC and touch screen
Film Carriage	Brake film carriage	250% Pre-stretch film carriage
Turntable Speed	1-10 cycles/minute	1-10 cycles/minute
Max Pallet Height	2100mm(Option: 2600/3000mm)	2100mm(Option: 2600/3000mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)	1500mm (Option: 1650/1800/2000mm)
Turntable Height	80mm	80mm
Turntable Motor	750W	750W
Pre-stretch Motor	/	250W
Lifting Motor	200W	200W
Max Pallet Weight	1500KG	1500KG
Power	1000W	1200W
Air Supply	0.6-0.7Mpa	0.6-0.7Mpa
Machine Weight	445KG	475KG
Machine Dimension	L2455*W730*H2530mm	L2455*W730*H253mm



Fully Automatic Wrapping Machine


SUNPACK®



Model	XT-201
Description	Horizontal stretch wrapper
Power Supply	220V 50HZ 1phase/110V 60hz 1phase
Control System	PLC
Film Carriage	250% Pre-stretch film carriage
Rotating Speed	30-80 RPM variable
Conveyor Speed	5-8 meters/min
Ring Diameter	700mm
Wrapping Size	600*400mm
Max Loading Weight	100KG
Power	1KW
Machine Weight	350KG



Model	XT-4505FAD
Description	Fully automatic pallet wrapper with top sheet dispenser
Power Supply	380V 50HZ 3phase
Control System	PLC and touch screen
Film Carriage	250% Pre-stretch film carriage
Turntable Rotating Speed	1-15 cycles/minute
Conveyor Speed	15 meters/minute
Max Pallet Height	1800mm(Option: 2100/2600mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)
Film Cutting Method	Heat cutting
Turntable Height	450mm
Turntable Motor	750W
Pre-stretch Motor	180W
Lifting Motor	180W
Max Pallet Weight	2000KG
Power	7500W
Air Supply	0.4-0.7Mpa

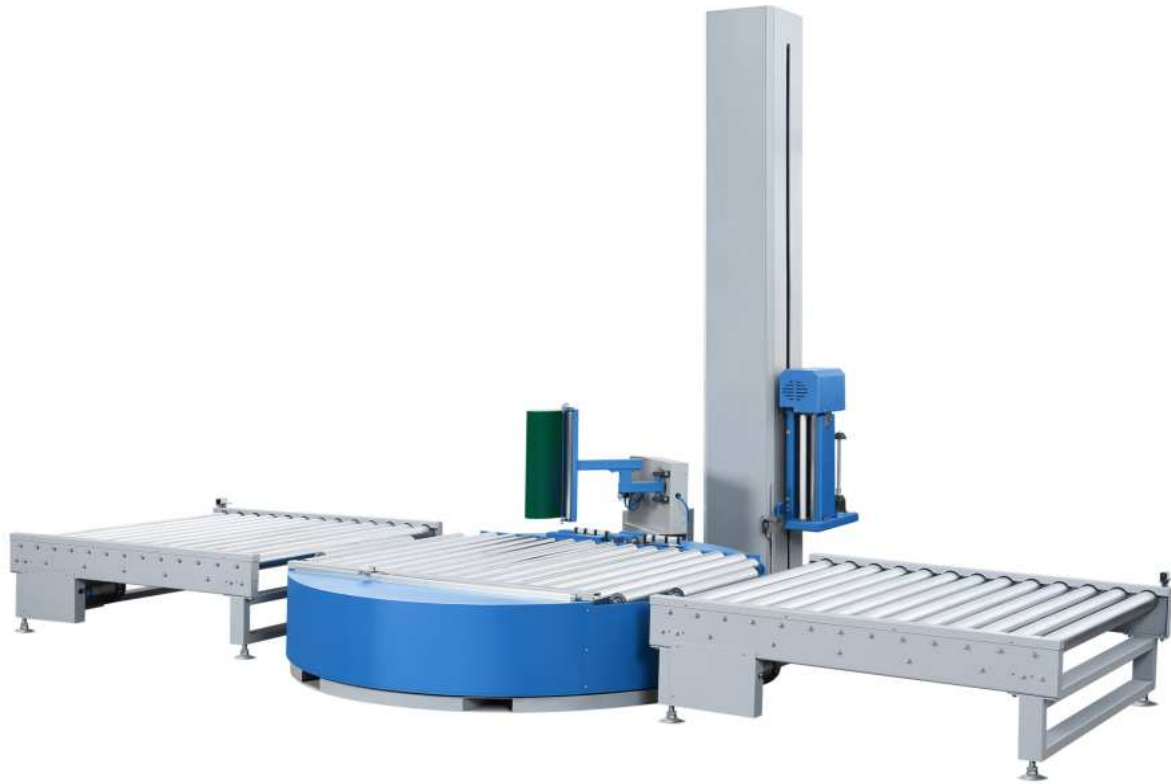

Model	XT-4505FA
Description	Inline automatic pallet wrapper
Power Supply	380V 50HZ 3phase
Control System	PLC and touch screen
Film Carriage	250% Pre-stretch film carriage
Turntable Rotating Speed	1-15 cycles/minute
Conveyor Speed	15 meters/minute
Max Pallet Height	1800mm(Option: 2100/2600mm)
Turntable Diameter	1500mm (Option: 1650/1800/2000mm)
Film Cutting Method	Heat cutting
Turntable Height	450mm
Turntable Motor	750W
Pre-stretch Motor	180W
Lifting Motor	180W
Max Pallet Weight	2000KG
Power	7500W
Air Supply	0.4-0.7Mpa



Model	XT-66D
Description	Rotary arm pallet wrapper with top sheet dispenser
Power Supply	380V 50HZ 3phase
Control System	PLC and touch screen
Film Carriage	250% Pre-stretch film carriage
Turntable Rotating Speed	1-15 cycles/minute
Conveyor Speed	15 meters/minute
Max Pallet Height	1800mm
Turntable Diameter	W(500-1200)mm*L(500-1200)mm
Film Cutting Method	Heat cutting
Turntable Height	450-600mm
Rotating Motor	750W
Pre-stretch Motor	180W
Lifting Motor	180W
Max Pallet Weight	2000KG
Power	3500W
Air Supply	0.4-0.7Mpa



Model	XT-66S
Description	Semi automatic rotary arm pallet wrapper
Power Supply	380V 50HZ 3phase
Control System	PLC and touch screen
Film Carriage	250% Pre-stretch film carriage
Turntable Rotating Speed	1-20 cycles/minute
Conveyor Speed	15 meters/minute
Max Pallet Height	1800mm
Pallet Size	W(500-1200)mm*L(500-1200)mm
Pre-stretch Motor	180W
Lifting Motor	180W
Power	1500W



Semi-Automatic Case Sealer

SUNPACK®



■ XT-CTB355



■ XT-CRL355

Model	XT-CTB355	XT-CRL355
Applicable Material	BOPP tape	BOPP tape
Material Specification	Length:1000meters Thickness:60mic	Length:1000meters Thickness:60mic
Tape Head	2"or3"	2"or3"
Arch Size	Max:500*500 mm	Max:500*500 mm
Sealing Size	Min:L150*W150*H150mm Max:L~*W500*H500mm	Min:L150*W150*H150mm Max:L~*W500*H500mm
Table Height	550-750mm	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	200W motor*2pcs	200W motor*2pcs
Control System	Buttons+contactors	Buttons+contactors
Sealing Speed	20 meters/minute	20 meters/minute
Machine Weight	225KG	225KG
Machine Dimension	L1776*W640*H1372mm	L1956*W916*H1609mm



■ XT-551TB



■ XT-553RL



■ XT-554TS

Model	XT-551TB	XT-553RL	XT-554TS
Applicable Material	BOPP tape	BOPP tape	BOPP tape
Material Specification	Length:1000meters Thickness:60mic	Length:1000meters Thickness:60mic	Length:1000meters Thickness:60mic
Tape Head	2" or 3"	2" or 3"	2" or 3"
Arch Size	Max:500*500mm	Max:500*500mm	Max:500*500mm
Sealing Size	Min:L150*W150*H150mm Max:L~*W500*H500mm	Min:L150*W150*H150mm Max:L~*W500*H500mm	Min:L150*W150*H150mm Max:L~*W500*H500mm
Table Height	550-750mm	550-750mm	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	120W motor *2pcs	120W motor *2pcs	120W motor *2pcs
Control System	ON-OFF switch	ON-OFF switch	ON-OFF switch
Belt Width	50mm	50mm	50mm
Sealing Speed	20 meters/minute	20 meters/minute	20 meters/minute
Machine Weight	125KG	125KG	135KG
Machine Dimension	L1885*W925*H1040mm	L1885*W925*H1040mm	L1871*W830*H1171mm



Model	XT-553TSBS
Applicable Material	BOPP tape
Material Specification	Length:1000meters Thickness: 60mic
Tape Head	2"or3"
Arch Size	Max:500*900mm
Sealing Size	Min:L150*W150*H150mm Max:L~*W500*H900mm
Table Height	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	120W motor*4pcs
Control System	ON-OFF switch
Belt Width	50mm
Sealing Speed	18 meters/minute
Machine Weight	145KG
Machine Dimension	L1871*W815*H1350mm



Automatic Case Sealer

SUNPACK[®]



Model	XT-CARL355
Applicable Material	BOPP tape
Material Specification	Length:1000meters Thickness: 60mic
Tape Head	2"or3"
Arch Size	Max:500*500mm
Sealing Size(L x W x H)	Min:L150*W150*H150mm Max:L~*W500*H500mm
Table Height	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	200W motor *2pcs
Control System	PLC
Belt Width	50mm
Sealing Speed	20 meters/minute
Machine Weight	125KG
Machine Dimension	L1958*W1016*H1550mm



Model	XT-553ARL
Applicable Material	BOPP tape
Material Specification	Length:1000meters Thickness: 60mic
Tape Head	2"or3"
Arch Size	Max:500*500 mm
Sealing Size(L x W x H)	Min:L150*W150*H150mm Max:L~*W500*H500mm
Table Height	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	180W Motor*2pcs
Control System	PLC
Belt Width	50mm
Sealing Speed	20 meters/minute
Air Supply	0.6-0.7Mpa
Machine Weight	155KG
Machine Dimension	L1979*W963*H1572mm



Model	XT-558FD	XT-558AF
Applicable Material	BOPP tape	BOPP tape
Material Specification	Length:1000meters Thickness:60mic	Length:1000meters Thickness:60mic
Tape Head	2"or3"	2"or3"
Arch Size	Max:500*500mm	Max:500*500mm
Sealing Size(L x W x H)	L200-600*W150-500*H120-500mm	L200-600*W150-500*H120-500mm
Table Height	550-750mm	550-750mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	180W motor *2pcs	180W motor *2pcs
Control System	PLC	PLC
Belt Width	50mm	50mm
Sealing Speed	20 meters/minute	20 meters/minute
Air Supply	0.6-0.7Mpa	0.6-0.7Mpa
Machine Weight	200KG	200KG
Machine Dimension	L2550*W915*H1450mm	L2868*W1107*H1910mm



■ XT-556SC



■ XT-556AC

Model	XT-556SC	XT-556AC
Applicable Material	BOPP tape	BOPP tape
Material Specification	Length:1000meters Thickness:60mic	Length:1000meters Thickness:60mic
Tape Head	2"or3"	2"or3"
Arch Size	Max:500*500mm	Max:500*500mm
Sealing Size	L320-500*W300-500*H180-500mm	L320-500*W300-500*H180-500mm
Table Height	650-800mm	650-800mm
Power Supply	220V 50hz 1phase or 110V 60hz 1phase	220V 50hz 1phase or 110V 60hz 1phase
Power Rate	180W motor*4pcs	180W motor*4pcs
Control System	PLC	PLC
Belt Width	50mm	50mm
Sealing Speed	300-360 Cartons/Hour	300-360 Cartons/Hour
Air Supply	0.6-0.7Mpa	0.6-0.7Mpa
Machine Weight	450KG	450KG
Machine Dimension	L1945*W1040*H1445mm	L2100*W1200*H1580mm



Strapping Tool

SUNPACK®



Model	RJ-250	AQD-19
Tool Weight	3.0kg	3.8KG
Strap Tension	/	3000N
Strap Material	PP/PET	PP/PET
Sealing Type	Friction	Friction
Strap Width	13mm-19mm	13mm-19mm
Strap Thickness	0.5-1.5mm	0.5-1.5mm



Model	XW50
Max Strap Tension	Max:8000N(at 0.8Mpa)
Air Pressure	0.4-0.8Mpa
Tool Weight	4.7KG
Overall Length	310mm
Tool Width	150mm
Tool Height	145mm
Strap Material	Polyester
Strap Width	30mm-50mm
Strap Thickness	0.6-2.0mm



Description	Combined steel pneumatic strapping tool
Model	GZA-32
Material	Steel
Steel Specification	32*(0.8-1.2) mm
Air Supply	0.45-0.65Mpa
Strapping Speed	4.2m/min
Seal Tension	≤18.4KN
Weight	15KG



Description	Combined steel pneumatic strapping tool
Model	GZD-19
Material	Steel
Steel Specification	(13-19)*(0.4-0.8)mm
Air Supply	0.45-0.65Mpa
Tension Speed	100mm/s
Strapping Tension	≤4KN/0.65Mpa
Weight	4.8KG



Description	Steel pneumatic strapping tensioner
Model	GSC-32
Material	Steel
Steel Specification	(19-32)*(0.8-1.2)mm
Air Supply	0.4-0.6MPa
Strapping Speed	2m/min
Strapping Tension	≤10KN/0.6Mpa
Weight	4.8KG



Description	Steel pneumatic strapping sealer
Model	DYA-32
Material	Steel
Steel specification	(32)*(0.8-1,2)mm
Air Supply	0.4-0.6Mpa
Strapping method	lock catch
Tensile Strength of Locking Part	≤16.8KN
Weight	3.5KG



Description	3 in 1 combination Plastic strapping tool
Model	P301
Material	PP strap
Steel Specification	(13 or16mm)*(0.4-0.8)mm
Weight	2.7KG
Size	377*150*150mm



Description	Manual strapping tensioner
Model	B330
Material	PP/PET strap
Steel specification	width: 13-19m thickness: 0.4-0.9mm
Weight	1.4KG



Description	Manual strapping tensioner
Model	B314
Material	Cord
Steel Specification	Width: 13-19m ,thickness 0.5-1.5mm
Weight	1.35KG
Welding Type	With buckle
Size	L270*W140*H68mm



Description	Manual strapping tensioner
Model	B410
Material	Cord
Strapping Size	13-50mm
Weight	2.3KG
Size	L320*W175*H110mm



Description	PET406 PET strapping dispenser	P200 PP strapping dispenser	S191 steel strapping dispenser
Applicable Strap	PET	PP	Steel
Caster	50mm	50mm	50mm
Tool Box	Yes	Yes	Yes
Strap Roll Core	200mm/406mm	200mm	-
Strap Roll Width	200mm	200mm	32mm
Net Weight	45KG	35KG	30KG



Description	Strap Width	Arm Length	Strap Thickness	Net Weight
C401	13mm	50mm	0.6mm	1.75KG
C310	16mm	50mm	0.6mm	1.75KG
C311	16mm	50mm	0.8mm	1.75KG
C312	19mm	50mm	0.8mm	1.75KG



Description	Sealless steel strapping tool
Model	A333
Strap Specification	Width:13/16/19mm Thickness:0.38-0.8mm
Weight	3.9KG
Strap Type	Steel
Sealing Type	Sealless
Lock Mode	Male and Female
Size	387*168*308mm
Strap Tension	700-850N



Description	Manual steel strapping tensioner
Model	SKL-32A
Strap Specification	(19-32)* (0.8-1.2) mm
Weight	3.2KG
Strap Type	Steel



Description	Manual steel strapping sealer
Model	SKS-32
Strap Specification	(19.25.32)*(0.8-1.2mm)
Weight	3.5KG
Strap Type	Steel
Sealing Type	Buckle



Description	Strapping cutter 32mm steel strapping
Model	GJ32